

Tamper Switch Kit for Security Panels

Installation Instructions

SEC-ENCTMPRSW

Part No. 24-10395-8, Rev. —
Issued October 15, 2007

Installation

1. Position the bracket on the inside of the right side panel so that the two screws go through the bracket holes. The screws are welded to the inside of the panel (Figure 1).

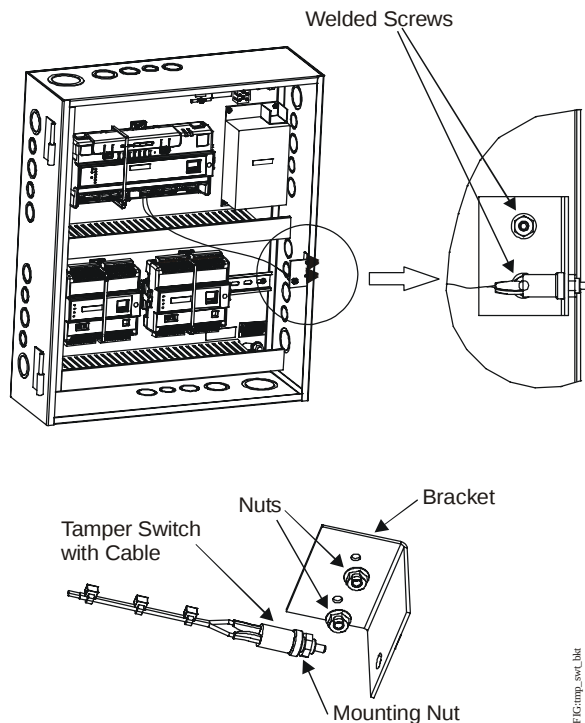


Figure 1: Panel Bracket and Screw Positioning

2. Secure the bracket with the provided nuts.
3. Insert the tamper switch through the larger single bracket hole and secure with the provided mounting nut.
4. Wire the tamper switch. The switch can be wired to any available S300-DIN-RDR2DSA or CK271 input point.

Parts Included

- tamper switch with cable
- bracket
- two bracket mounting nuts
- tamper switch mounting nut

JOHNSON
CONTROLS

Controls Group
507 E. Michigan Street
Milwaukee, WI 53202

*Metasys® is a registered trademark of Johnson Controls, Inc.
All other marks herein are the marks of their respective owners.
© 2007 Johnson Controls, Inc.*