

Shear beam To 2,000 kg Model F3201

WIKA data sheet FO 51.72



For further approvals,
see page 2

Applications

- Floor scales
- Weigh feeders
- Platform scales
- Laboratory technology
- Stage construction

Special features

- Measuring ranges 0 ... 500 to 0 ... 2,000 kg
- 3,000 intervals per OIML R60 Class C
- Stainless steel, hermetically sealed and welded, Ingress protection: IP68 and IP69K
- High long-term stability
- High side load tolerance



Shear beam, model F3201

Standard
articles



Description

Shear beams are suitable for static and dynamic measuring requirements. They serve for determining shear forces in diverse fields of application.

These shear beams are used in industrial weighing and laboratory technology, and also in the process industry.

The F3201 shear beams are made of stainless steel, whose properties are particularly suitable for the fields of application in scales, laboratory technology and stage construction. An mV/V signal is provided as the output signal.

Notes

To avoid overloading, the shear beam should be electrically connected and the measured value monitored during assembly.

The measuring force must be introduced through the centre and free of transverse force. When assembling the shear beam, care should be taken that the support surface is flat.

Compatible force introduction pieces are available as an option.

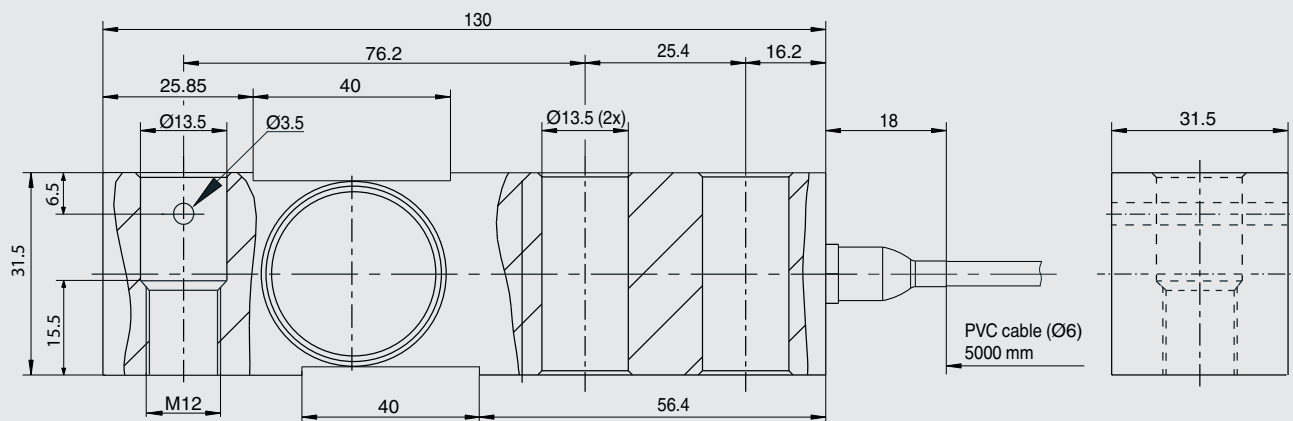
Specifications per VDI/VDE/DKD 2638

Model F3201	
Rated load F_{nom} kg	500, 750, 1,000, 2,000
Relative linearity error d_{lin}	0.017 % F_{nom}
Accuracy class	3,000 intervals per OIML R60 Class C
Relative creep, 30 min.	$< \pm 0.016 \% F_{nom}$
Relative reversibility error v	$\pm 0.015 \% F_{nom}$
Temperature effect on zero signal TK_0	$\leq \pm 0.012 \%/10 \text{ K}$
Temperature effect on characteristic value TK_C	$\leq \pm 0.02 \%/10 \text{ K}$
Force limit F_L	150 % F_{nom}
Breaking force F_B	200 % F_{nom}
Material of the measuring body	Stainless steel
Rated temperature range $B_{T, nom}$	-10 ... +40 °C
Operating temperature range $B_{T, G}$	-30 ... +70 °C
Input resistance R_e	400 $\pm 20 \Omega$
Output resistance R_a	350 $\pm 3 \Omega$
Insulation resistance R_{is}	$\geq 5,000 \text{ M}\Omega$
Output signal (rated characteristic value) C_{nom}	2.0 mV/V
Electrical connection	Measuring cable $\varnothing 6 \times 5 \text{ m}$
Excitation voltage $B_{U, nom}$	DC 10 V ... 15 V
Ingress protection (per IEC/EN 60529)	IP68 and IP69K
Weight	0.9 kg


Approvals

Logo	Description	Country
	EU declaration of conformity	European Union
	RoHS-directive	
	International Organization of Legal Metrology	International

500 kg




750 ... 2.000 kg













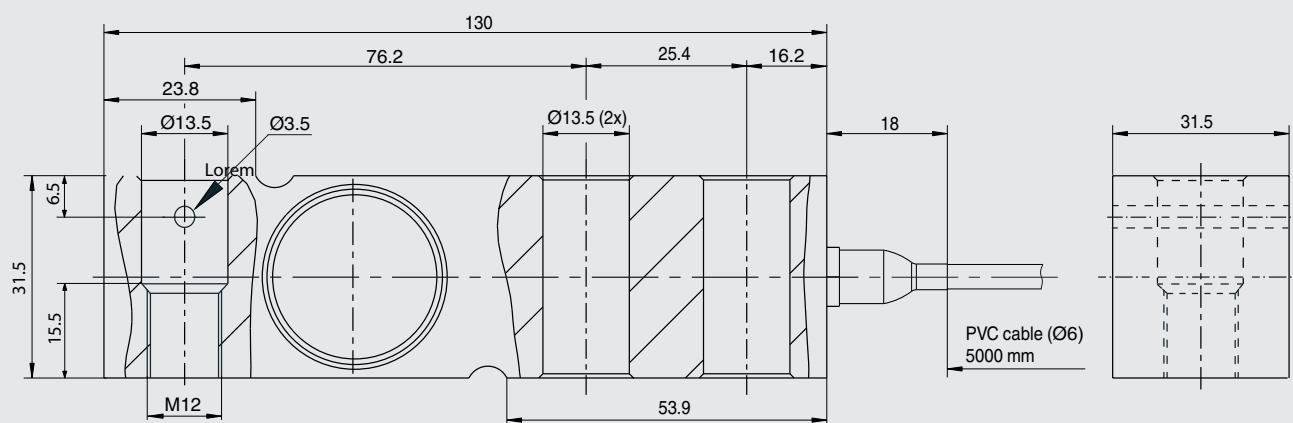


Pin assignment


Electrical connection	
Excitation voltage (Exc+)	Green
Excitation voltage (Exc-)	Black
Signal (Sig+)	Red
Signal (Sig-)	White
Sense (+)	Blue
Sense (-)	Yellow
Shield	Shield

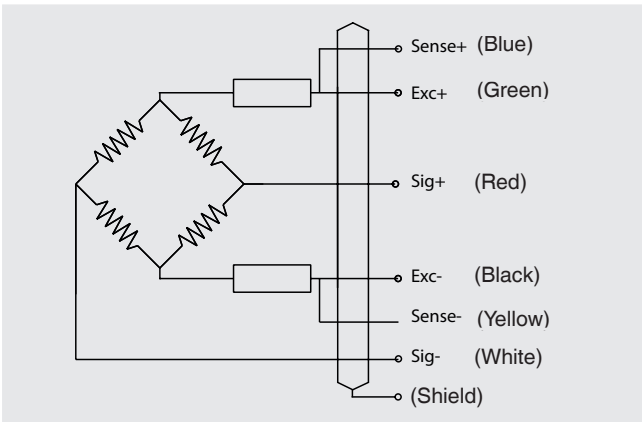

Accessories

	Description								
AZK02 	Mounting kit ■ Material: Steel or stainless steel ■ Weight: 7 kg Mounting options <table><tr><th colspan="2">4 Vessel feet</th></tr><tr><td> Tangential Mounting </td><td> Radial Mounting </td></tr><tr><th colspan="2">3 Vessel feet</th></tr><tr><td> Tangential Mounting </td><td> Radial Mounting </td></tr></table>	4 Vessel feet		Tangential Mounting 	Radial Mounting 	3 Vessel feet		Tangential Mounting 	Radial Mounting 
4 Vessel feet									
Tangential Mounting 	Radial Mounting 								
3 Vessel feet									
Tangential Mounting 	Radial Mounting 								
AZK01	Mounting options as for AZK02. In addition to the AZK02 installation kit, base plates, load feet and rubber elements are also available. Dimensions on request.								

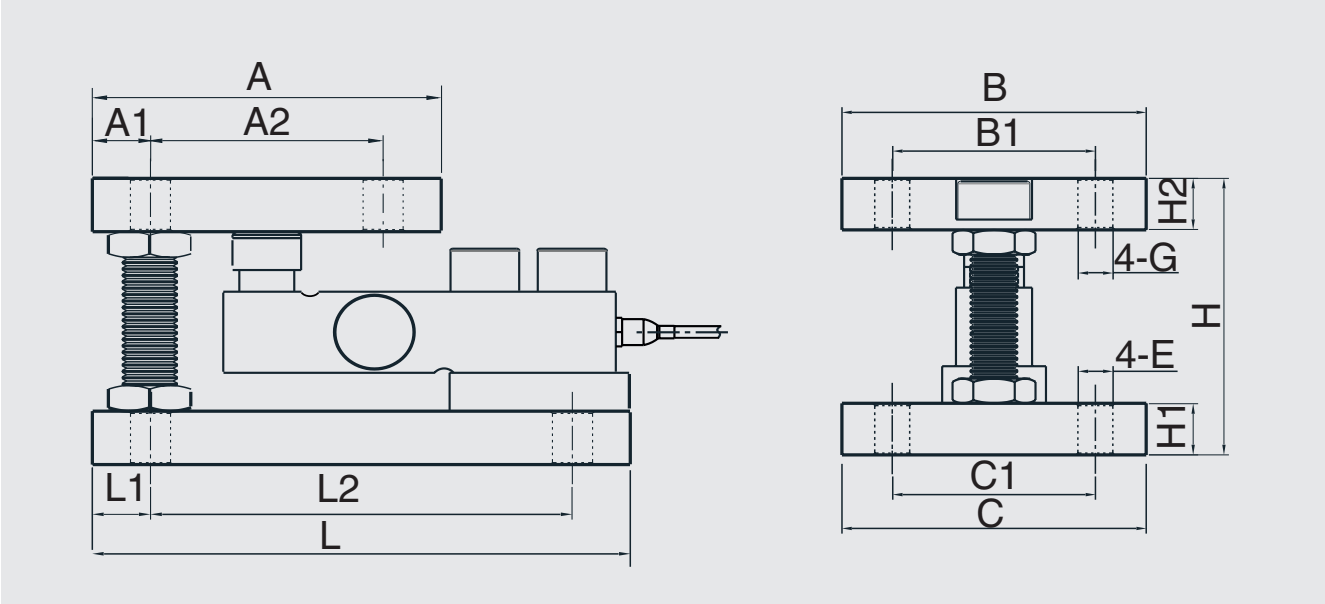Dimensions in mm



Rated load in kg	Dimensions in mm														
	L	L1	L2	A	A1	A2	B	B1	C	C1	H	H1	H2	ØG	ØE
500 / 750 / 1,000 / 2,000	168	15	136	100	15	70	100	70	100	70	94	20	20	13.5	11

Ordering information

Model / Rated load / Relative linearity error / Temperature range / Output signal / Electrical connection / Approvals, certificates

© 03/2021 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
info@wika.de
www.wika.de